

## OUTDOOR LIGHTING

# AIM



### GENERAL

AIM / AIM LOW / AIM EXTRA LOW  
Article number \_\_\_ 10401360 / 10401355 / 10401350  
Category \_\_\_\_\_ solitary  
Light source \_\_\_\_\_ LED  
Warranty \_\_\_\_\_ 5 years

### DIMENSIONS

Length \_\_\_\_\_ -  
Width \_\_\_\_\_ -  
Height \_\_\_\_\_ 800 mm / 400 mm / 160 mm  
Diameter \_\_\_\_\_ 28 mm / 1.1"  
Total height \_\_\_\_\_ -  
Recess depth \_\_\_\_\_ -

### ELECTRONICS

Voltage \_\_\_\_\_ 12V AC  
Output \_\_\_\_\_ 1.2 Watt  
VA \_\_\_\_\_ 2.1  
Power factor \_\_\_\_\_ 0.56  
Light source \_\_\_\_\_ 1x SMD 1 W  
Lifetime \_\_\_\_\_ 25000 hours  
Dimmable \_\_\_\_\_ no  
Length of cable lead \_\_\_\_\_ 600 mm / 24"

### LIGHT SPECIFICATIONS

Color temperature \_\_\_\_\_ 3000 K  
CRI (RA) \_\_\_\_\_ 90  
Luminous intensity \_\_\_\_\_ 157.7 Cd  
Light beam 0-180 \_\_\_\_\_ 35°  
Light beam 90-270 \_\_\_\_\_ 35°  
Net luminous flux \_\_\_\_\_ 84 lumen  
Luminous efficiency \_\_\_\_\_ 70 lumenwatt

### MATERIAL



Ring / Plate \_\_\_\_\_ aluminum  
Lens \_\_\_\_\_ polycarbonate  
Exterior \_\_\_\_\_ -  
Easy Lock included \_\_\_\_\_ yes  
Installation hardware included \_\_\_\_\_ yes

### AVAILABLE LENGTHS

AIM: 10401360  
AIM LOW: 10401355  
AIM EXTRA LOW: 10401350

### PROTECTION RATING

IP : 55

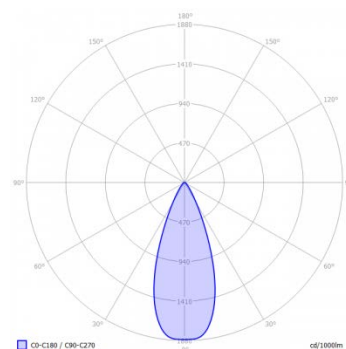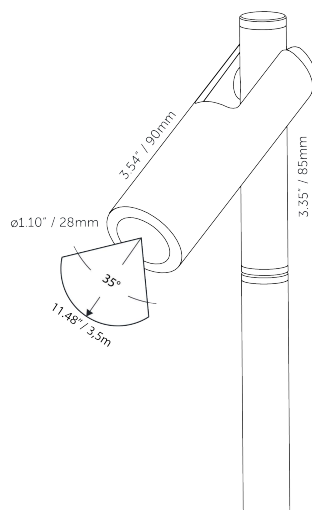

ILLUMINANCE - CONE OF LIGHT		
CENTER BEAM (FC)	BEAM DIAMETER (FT)	DISTANCE (FT)
39	1.26	2.0
10	2.52	4.0
4	3.78	6.0
2	5.04	8.0
2	6.31	10.0
1	7.57	12.0

Beam angle (0-180°) (90-270°): 96°  
edge illuminance is 1/2 of Centre beam

12 VOLT



in-lite®